


IoT SERVER

DIGITAL VIDEO HOST

EEN16HSB-S

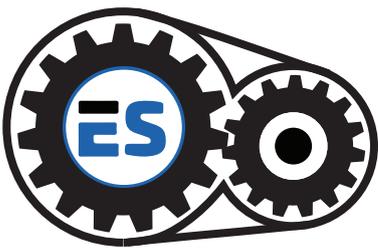

FEATURES

High performance cloud technology DVR

Pentabrid(AHD+TVI+CVI+Analog+ IP) DVR with NVR functionality and IP camera support.

HDMI / VGA / Video simultaneous video output

EvSvr™

**IoT
Ready**

EEN16HS-B

IoT-Server | EEN16HSB-S

v1.2-8.17

System	
Operating System	Linux (Ubuntu 16.04 LTS Server or higher)
Video	
Input	Analog: 16*1080N Network: 16*(4K)
Signal Type	Analog/AHD/CVI/TVI 2.0/Network
Audio	
Input	2 Channel, RCA
Output	1 Channel, RCA
Video Output	
Encoding	16 Channels H.264 + Secondary Stream 4 Channels 4K
Network	
Interface	1 RJ45 10M/100M Adaptive Ethernet Interface
Network Functions	HTTP, RTSP, IPv4, IPv6, NTP, FTP, UPNP
Secondary Stream	CIF(1~12fps) on Analogue Input 1080N on Digital Input
General	
Power Consumption	DC 12V ≤6W (Without Hard Disk)
Working Environ	-10~55°C/10~90%
#Software license compatibility codes: FW-STRRSPxx ; ES-STRTSPxx, ES-STRMFULLxx	

*Exact products and specifications shown may vary by geographic region and are subject to change without notice. Weights and measurements are approximate and may vary.